


DESKY® BAR ACTIVE STOOL INSTUCTION MANUAL

PARTS


A **SEAT** QTY1	B **GAS LIFT** QTY1	C **BASE** QTY1	D **RUBBER RING** QTY1
			

STEP 1

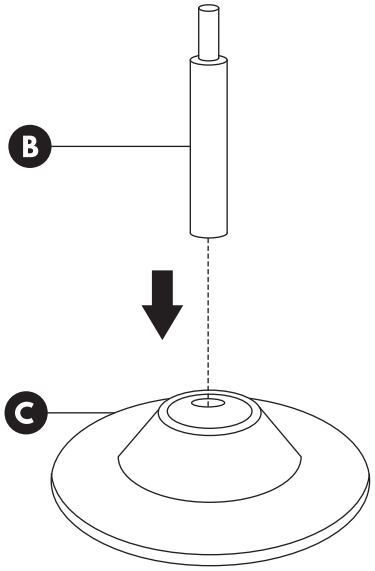


Gather parts. Insert gas lift **B** into base **C**.

STEP 2

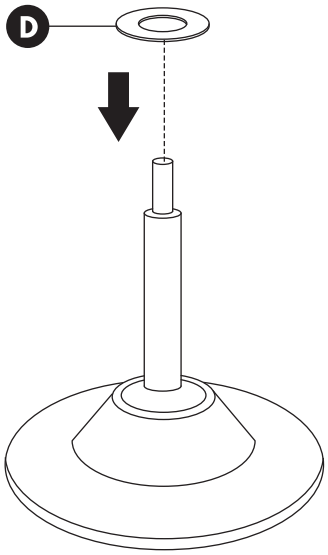


Take the rubber ring **D** and place around the gas lift **B**.

STEP 3

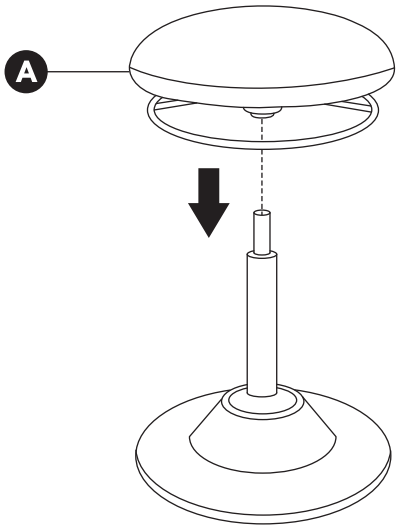

Place seat **A** onto gas lift **B**. Press down firmly to secure.

STEP 4

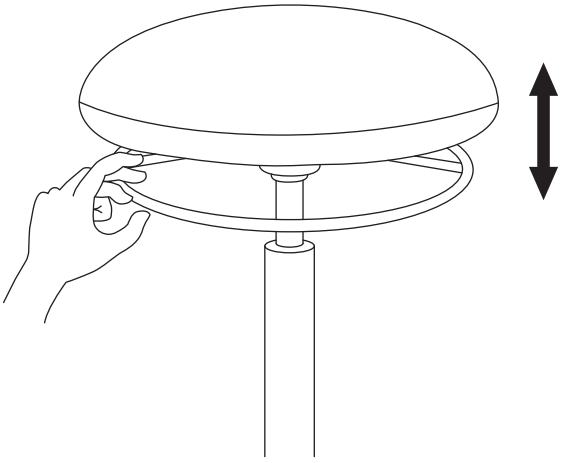

TO ADJUST HEIGHT: Grab metal ring from any place then lift to raise or lower the seat.