





DESKY® DUAL MONITOR ARM INSTALLATION MANUAL


PARTS

A SCREW QTY4 	**B** THROUGH DESK MOUNT QTY1 	**C** GROMMET MOUNT PLATE QTY1 	**D** TENSION KEY QTY1 	**E** SWIVEL KEY QTY1 
F LOCKING PIN QTY1 	**G** ARM BASE QTY1 	**H** LOWER ARM QTY1 	**I** UPPER ARM QTY1 	**J** VESA BRACKET QTY1 


CLAMP INSTALLATION

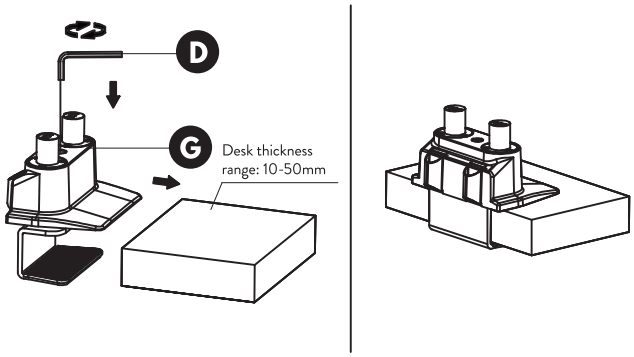


THRU DESK INSTALLATION

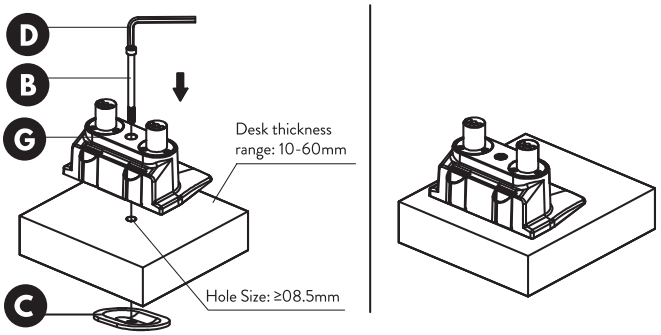


STEP 1

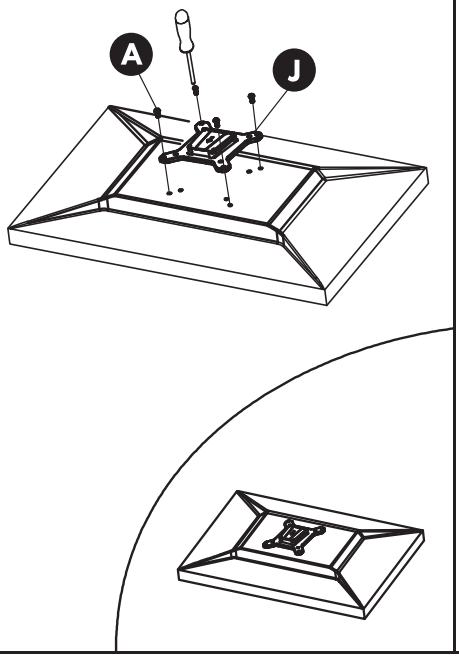

STEP 2

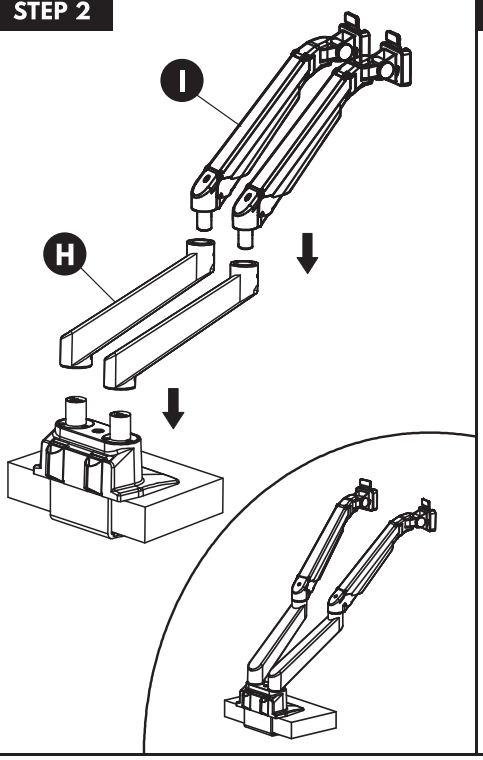



STEP 3

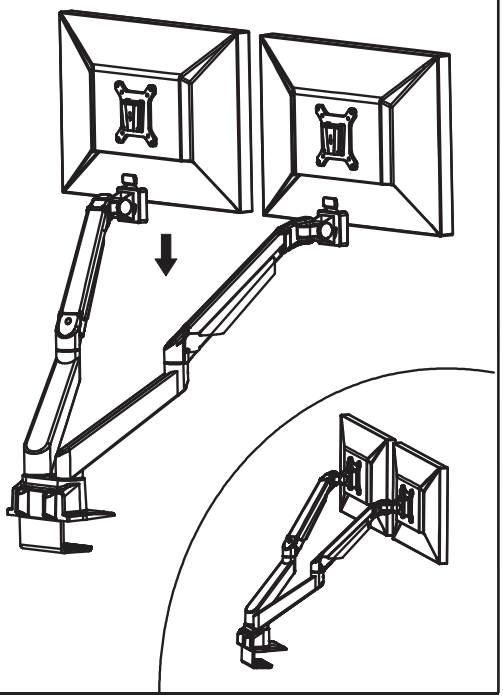


DESKY® DUAL MONITOR ARM INSTALLATION MANUAL

STEP 4

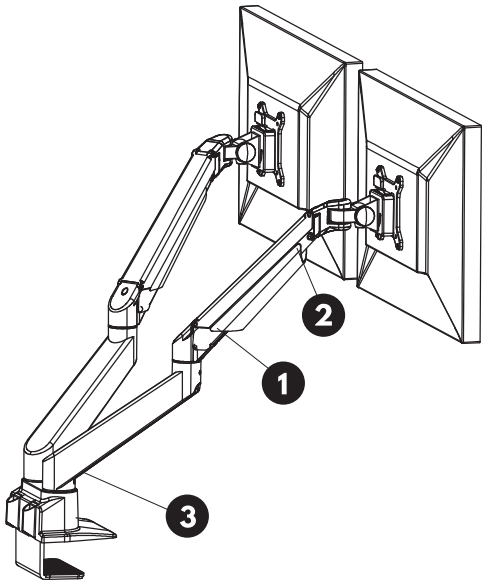


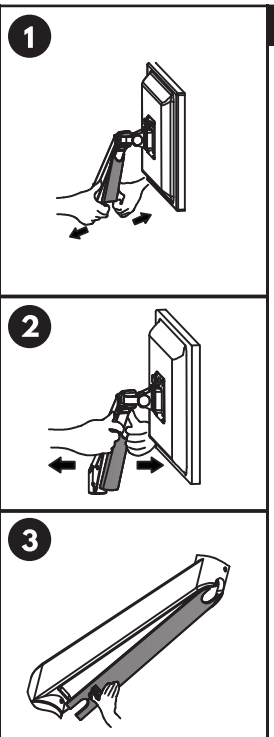


STEP 5

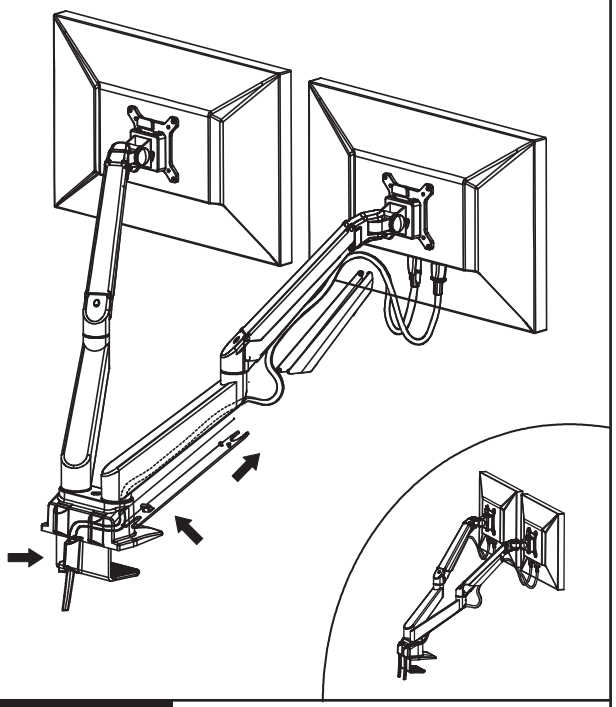


ROTATION LIMIT

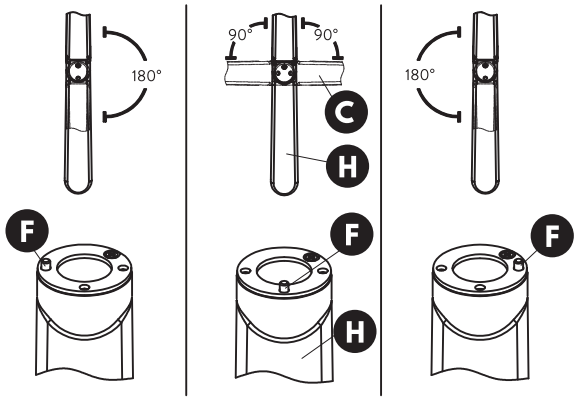

ADJUSTMENT STEP 1

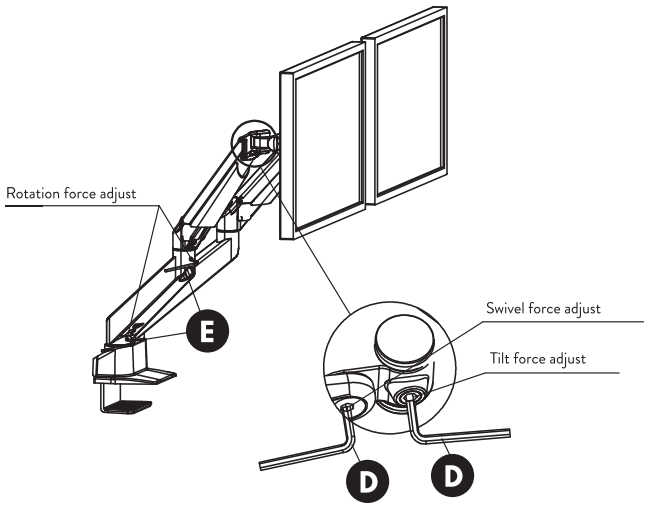

ADJUSTMENT STEP 2

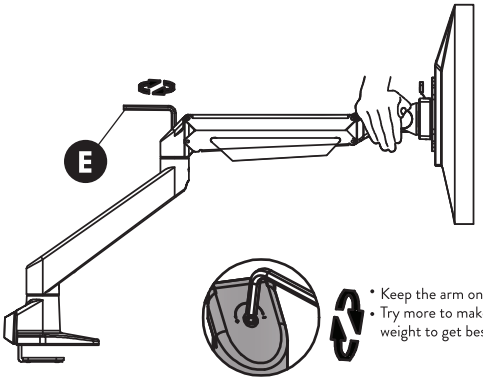

- Keep the arm on horizontal position before adjusting
- Try more to make above adjustment based on monitor weight to get best free-stop effect

ADJUSTMENT STEP 3

