





DESKY® HEAVY DUTY SINGLE MONITOR ARM INSTALLATION MANUAL

PARTS


A **SCREW** QTY4 	**B** **THROUGH DESK MOUNT** QTY1 	**C** **GROMMET MOUNT PLATE** QTY1 	**D** **TENSION KEY** QTY1 	**E** **SWIVEL KEY** QTY1 
F **LOCKING PIN** QTY1 	**G** **ARM BASE** QTY1 	**H** **LOWER ARM** QTY1 	**I** **UPPER ARM** QTY1 	**J** **VESA BRACKET** QTY1 

CLAMP INSTALLATION


With open space behind




With screen or other objects behind

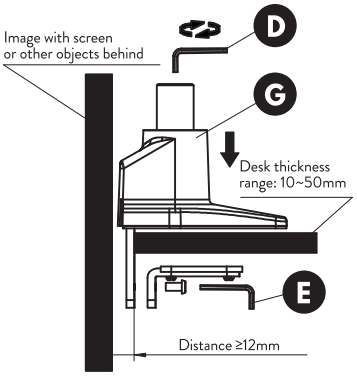


THRU DESK INSTALLATION

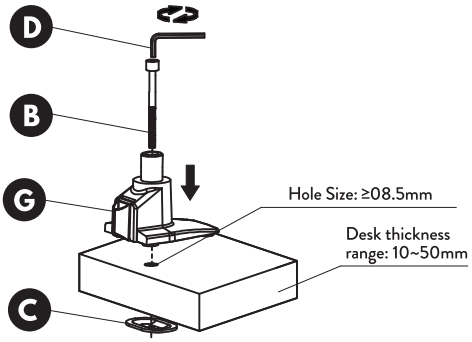


STEP 1

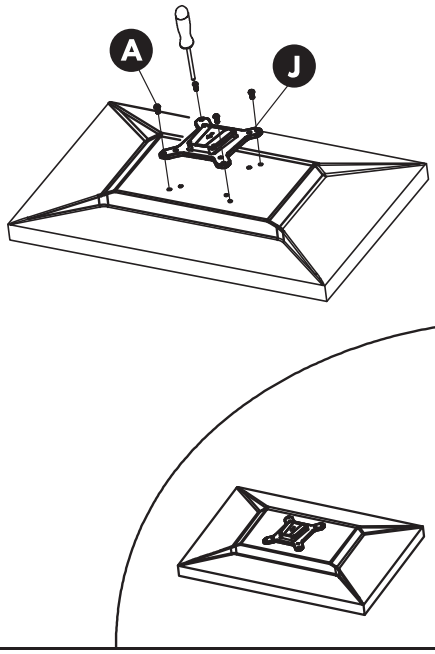

STEP 2

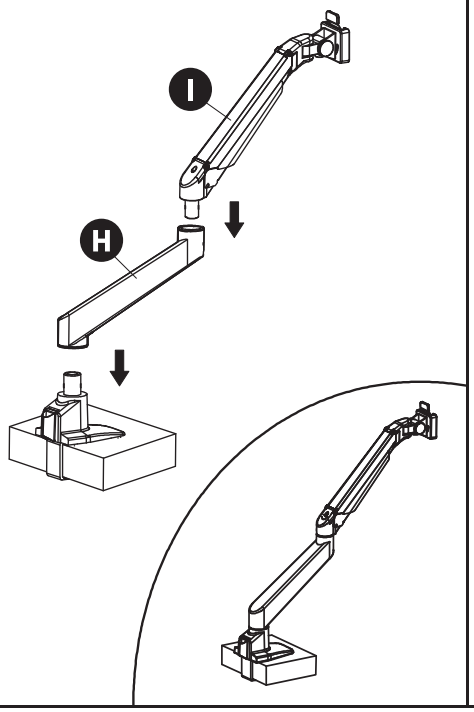



STEP 3

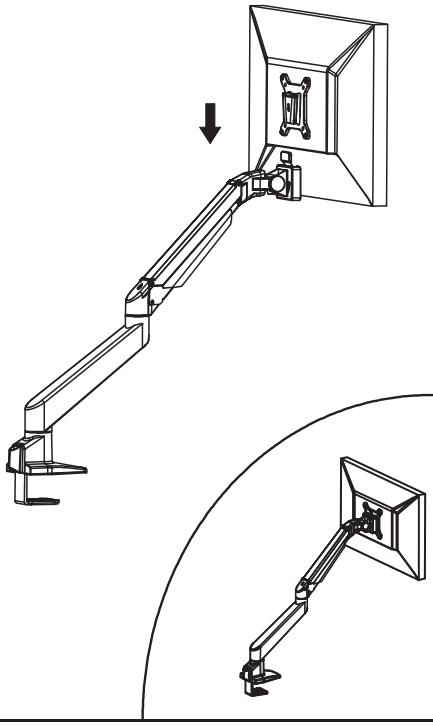


DESKY® HEAVY DUTY SINGLE MONITOR ARM INSTALLATION MANUAL

STEP 4

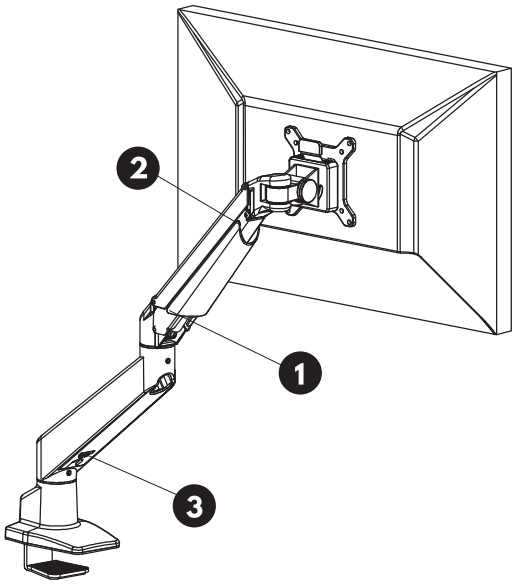


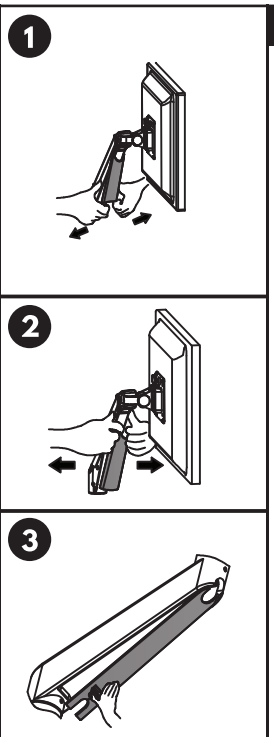


STEP 5

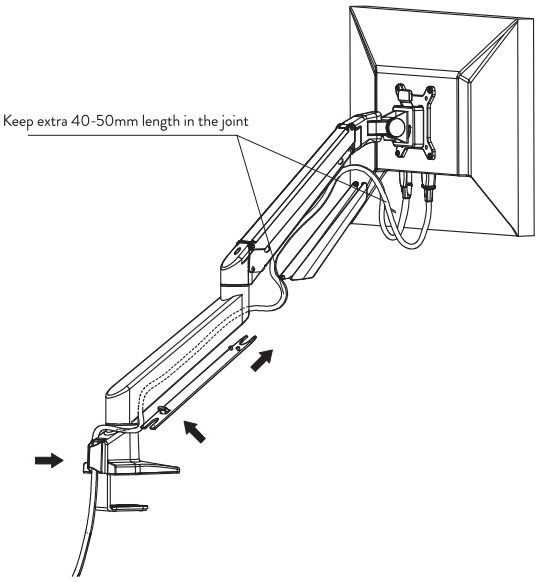


ROTATION LIMIT

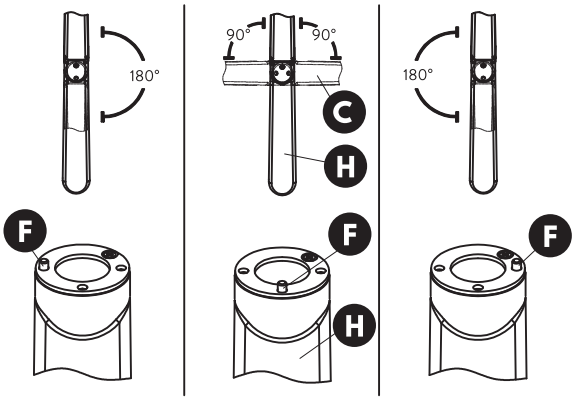

ADJUSTMENT STEP 1

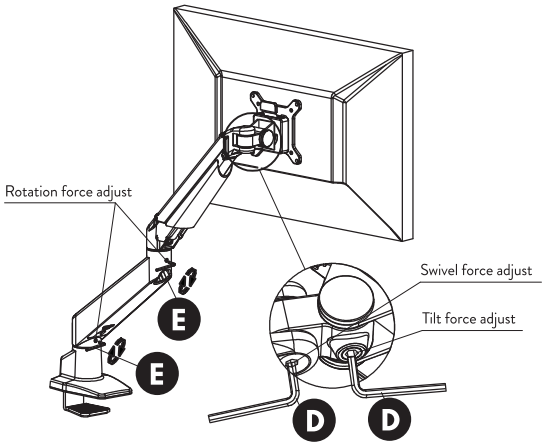

ADJUSTMENT STEP 2

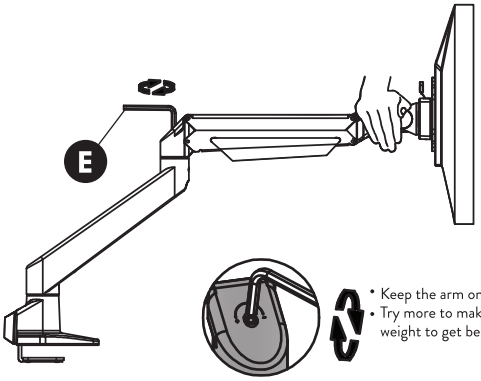

- Keep the arm on horizontal position before adjusting
- Try more to make above adjustment based on monitor weight to get best free-stop effect

ADJUSTMENT STEP 3

